

12 GHz Amplified Lightwave Receiver



SK-LR-12-M

The Optilab SK-LR-12-M is a 12 GHz bandwidth amplified PIN photodiode receiver module designed for RF over fiber, antenna remoting, and broadband RF signals transmission applications using single mode optical fiber. The SK-LR-12-M utilizes a wide bandwidth PIN photodiode plus a linear Trans-Impedance Amplifier (TIA) that provides optical to RF conversion to the frequency range beyond 12 GHz. The SK-LR-12-M is a highly linear O/E converter that can be used for every type of analog and digital signal, with remote status monitoring through an RS-232 I/O interface. When the SK-LR-12-M RF over fiber receiver module is linked with the LT-15-M lightwave transmitter module, the combination provides an excellent solution for ultra-wideband RF to fiber conversion applications, go to optilab.com for more detail.


Features

- RFoF Amplified Receiver, 0.01 GHz to 12 GHz
- Highly Linear for Analog Transmission
- Linear TIA Gain of 500
- RS-232 Monitor Interface
- Housing shields RF and thermal interference

Applications

- Wideband RF Transmission over Fiber
- RF/IF Signal Distribution
- Satcom microwave antenna signal distribution
- EW Systems
- Broadband delay-line and signal processing
- Radar system calibration
- Phased and interferometric array antenna

Functional Diagram

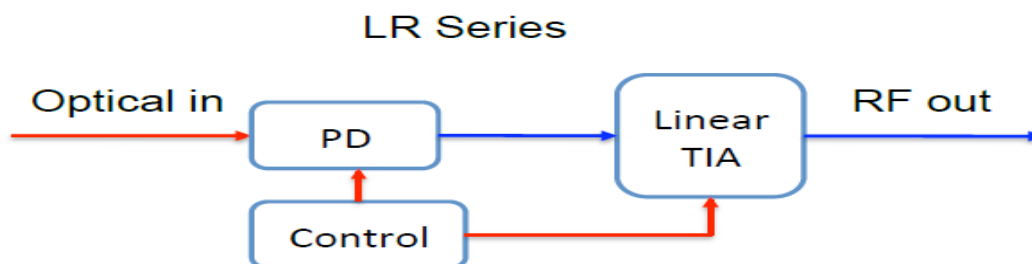

General Specifications	
Photodiode Wavelength Range	1250 nm to 1650 nm
Operational Bandwidth	0.005 GHz to 12 GHz
Optical Input Level	+3 dBm max.
Repsonsitivity	0.85 A/W @ 1550 nm typ.
Trans-Impedance Gain	500 typ.
S21 3 dB Bandwidth	12 GHz typ.
S22 Characteristics	< -10 dB to 10 GHz typ.
Optical Return Loss	-30.00 dB typ.
2nd Harmonics Distortion	-60.0 dBc max.
3rd Harmonics Distortion	-70.0 dBc max.
Optical PDL @ 1550 nm	0.05 dB typ., 0.1dB max.
Output Coupling	AC Coupled
RF Impedence	50 Ω
Ripple over Bandwidth	± 1.0 dB
Mechanical Specifications	
Operating Temperature	-40° C to +70° C
Storage Temperature	-55° C to +85° C
Power Supply Requirements	+12 V DC, 500 mA max.
Optical Connector	FC/APC
RF Input Connector	K Connector Female, 50 Ω
DC Connector	DB-9
Local Alarm	LED: Optional Input Power
Remote Alarms	RS-232 Interface (Optional)
Dimensions	130 mm x 70 mm x 35 mm
Accessories Included	110 V - 240 V AC Adaptor & Cable
Housing	Precision Mach. Anodized Aluminum

Typical S21 Bandwidth

